




Adjustment

 As a final check during installation, it is recommended that all security grubs on all hinge types are tightened. It is important that the security grub screw is never loosened.

 The slave door must be fully locked for the main lock mechanism to operate.

Horizontal adjustment

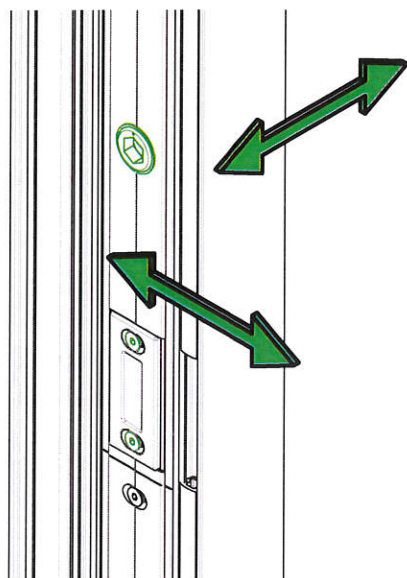

Keep - horizontal + 1 to 4mm: Using a 10mm Allen Key - $\frac{1}{4}$ turn = 1mm, Full turn = 4mm

Keep - compression +/- 2mm: Using a 2.5mm Allen Key the latch plate can be altered to increase or decrease compression.

5